


A capacitive power supply is the best solution for a low-cost energy meter. It works on the principle of reducing the line voltage (Voltage dropper) by having a series capacitor between phase and neutral. Current flowing through this capacitor is inversely proportional to the impedance of the capacitor as given by the formula:

$$\text{Impedance (Z)} = 1/(2\pi fC)$$

f is the line frequency and

C is the capacitance of the series impedance capacitor.

The output of the capacitor needs to be rectified to generate the DC output signal

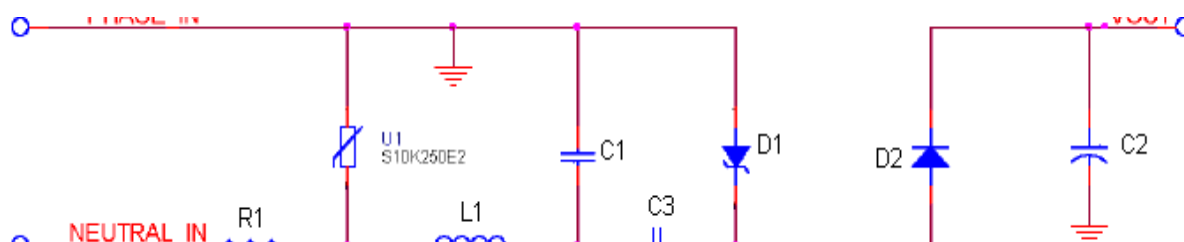

The output current of the rectifier circuit has ripples of positive half-cycles, so a bulk capacitor C2 is used to provide a ripple-free DC signal to the system. This capacitor provides smooth output voltage until the amount of load current is less than the charging current.

To obtain a higher output current, increase the capacitor value C3 on the AC line.

A filter network consisting of C1 and L1 removes noise from the input AC signal.

Capacitance	Function	Type		Capacitance range
C1	Noise filter	MPP-X2	275Vac/305Vac	0.01 to 1μF
C2	Ripple filter	Electrolytic	-	-
C3 (Series impedance capacitor)	Voltage Dropper	MPP-AC, MPP-X2, MPET-AC-High capacitance stability	275Vac/305Vac, 300Vac, 440Vac	0.1 to 1μF

### Reliability under hot humid condition...

Power utilities around the world are rolling out smart meters in order to enable automated meter reading and optimized energy management. These meters can be located in any area like high temperature area, high humidity areas. Some of our customers manufacturing industrial energy meters informed us that they were facing problems of change in capacitance value in capacitors used in energy meters in coastal areas.

## How the capacitor fails?

The capacitor generally fails in three modes which is directly affecting the capacitance value

1. Capacitor short
2. Capacitor open
3. Degradation of capacitance

### Capacitor short:

The capacitor gets short circuited with very high loss factor. It occurs when the dielectric breaks down completely and film melts. It is a very severe case. This is not the cause for the observed failure in the capacitors since here the failure is due to capacitance drop.

### Capacitor Open:

- The capacitance value drops by more than 30% .When the capacitor is opened, there is no damage to the film metallization. This is called capacitor open. This failure is due to process defect either in metal spray operation or due to weak welding of terminals. This is not the problem in this case since there is damage the film metallization.

### Degradation of capacitance

The capacitance value is dropped to an extent. There two reasons for capacitance drop.

- Excessive self-healing
- Metal oxidation

### Excessive self-healing


- The self-healing occurs only at the weak points of the dielectric leaving other areas of metallization healthy. It is mainly due to voltage spikes/stress & temperature



Self Healing

Designed to withstand capacitor in hot and humid condition

In order to minimize the self healing effect of the capacitor due to high voltage Deki designed capacitor in the following manner.

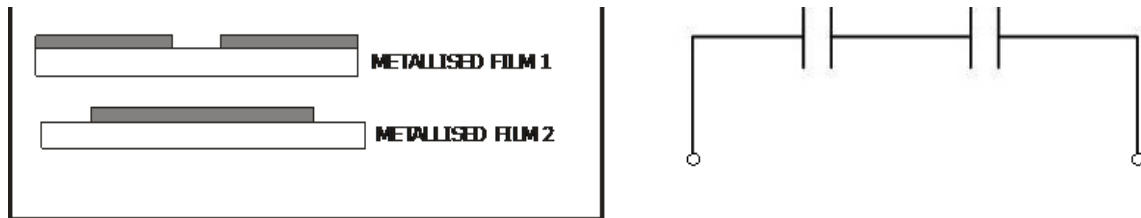

This makes two capacitors in series so it divides the voltage by half. So it decreases the self healing effect of the capacitor. Deki discussed this issue with the R&D department of the film supplier who developed humidity resistance film for this capacitor. Both effects combine to give very good results in hot and humid condition.

#### **Comparison between high stability capacitor and normal capacitor**

The graph below shows the difference between our normal capacitor and heavy duty capacitor when we applied 240 v ac at 85°C and 85% RH.

