


Film Capacitors

Series/Type: AC & Pulse Metallized Polypropylene
Film Capacitor (PP/MMPP Series)

Series code: 29

29 AC & Pulse Metallized Polypropylene Film Capacitor (PP/MMPP Series)

Part Number Description

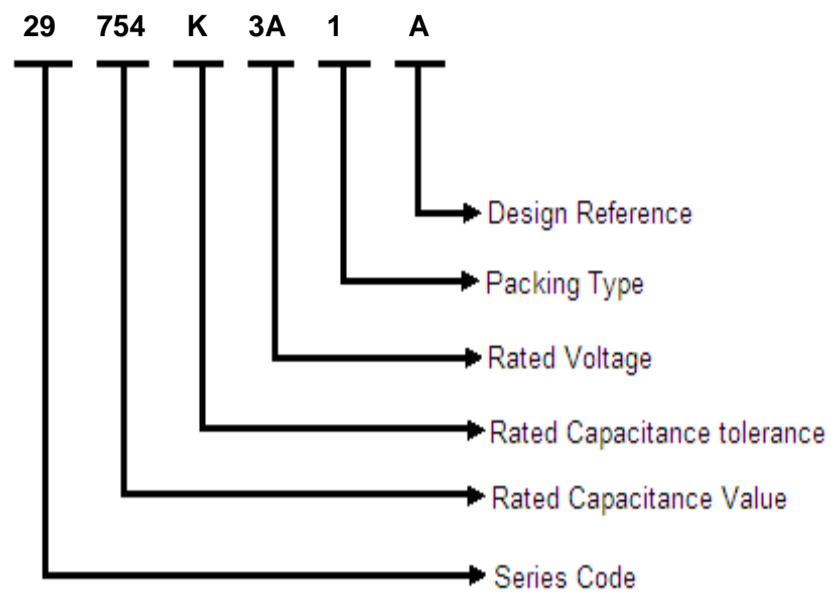

Rated Capacitance

Three-digit (754) indicate rated capacitance in Pico Farad (First two digits indicate value & third digit indicates number of zeroes to be suffixed to first two digits).

For example:

103	= 10 ×	10 ³	= 10000 pF	= 10 nF	=0.01 μF
104	= 10 ×	10 ⁴	= 100000 pF	= 100 nF	=0.1 μF
105	= 10 ×	10 ⁵	= 1000000 pF	= 1000 nF	=1 μF
106	= 10 ×	10 ⁶	= 10000000 pF	= 10000 nF	=10 μF

Capacitance Tolerance

F = ±1%, G = ±2%, H = ±2.5%, I = ±3.5%, J = ±5%, K = ±10%, L = ±15%, M = ±20%, N = ±40%

Rated Voltage

One digit and one letter (3A) or two digits indicate rated voltage.

Rated Voltage Codification

For DC Rated Voltage													
A		B		C		D		E		F		G	
1A	10	1B	12.5	1C	16	1D	20	1E	25	1F	30	1G	40
2A	100	2B	125	2C	160	2D	200	2E	250	2F	300	2G	400
3A	1000	3B	1250	3C	1600	3D	2000	3E	2500	3F	3000	3G	4000
H		I		J		K		L		M		N	
1H	50	1I	45	1J	63	1K	70	1L	80	1M	85	1N	90
2H	500	2I	450	2J	630	2K	700	2L	800	2M	850	2N	900
3H	5000	3I	4500	3J	6300	3K	7000	3L	8000	3M	8500	3N	9000
4H	520												
O		P		Q		R		S		U		V	
1O	110	1P	120	1Q	1U	1U	15	1S	17	1U	130	1V	60
2O	1100	2P	1200	2Q	2U	2U	150	2S	170	2U	1300	2V	600
3O	11000	3P	12000	3Q	3U	3U	1500	3S	1700	3U	13000	3V	6000
For AC Rated Voltage													
01	02	03	04	05	06	07	08	09	10	11	12	13	14
190 VAC	250 VAC	275 VAC	305 VAC	310 VAC	440 VAC	500 VAC	600 VAC	700 VAC	63 VAC	230 VAC	330 VAC	400 VAC	450 VAC


only better

29 AC & Pulse Metallized Polypropylene Film Capacitor (PP/MMPP Series)


*Packing Type details:

- 1: Bulk packing (original pitch)
- 2: Bulk packing (after forming & cutting)
- 3: Ammo packing (after forming & taping)
- 4: Bulk packing (after forming in original pitch without cut)
- 5: Bulk packing (after formed & without cut)
- 6: Ammo packing (Straight lead)
- 7: Bulk packing (Straight lead cut)
- 8: Reel packing (Straight lead)

Reference Data

Capacitance	0.0001 μ F to 0.15 μ F
Capacitance Tolerance	\pm 5% to \pm 10%
Rated DC Voltage	630Vdc to 2000Vdc
Permissible rated AC voltage	400Vac to 700 Vac
Climatic testing class according to IEC 60068-1	40/100/56
Maximum application temperature	100°C
Rated temperature	85°C for rated DC voltage and 75°C for rated AC voltage
Reference standard	IEC 60384-16 & IEC 60384-17
Dielectric	Polypropylene
Electrodes	Aluminium foil
Construction	Series
Encapsulation	Encased in flame retardant box filled with resin
Leads	Tinned wire
Marking Example	Type of capacitor, rated capacitance, rated tolerance and rated voltage will be available on each and every capacitor. Example- PP-MMPP D105J3D
Compatibility to RoHS	

Dimensions Description

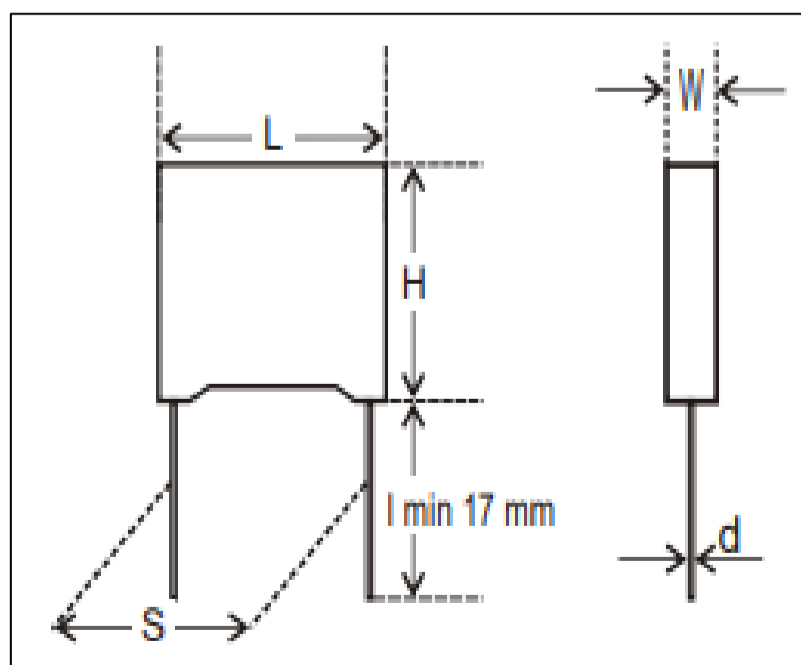

only better

29 AC & Pulse Metallized Polypropylene Film Capacitor (PP/MMPP Series)

Rated Voltage	Cap. in	W	H	L	S	d	dv/dt	Item code
	μF	(± 0.5)	(± 0.5)	(± 0.5)	(± 0.5)	(± 0.05)	V/ μs	
1000VDC	0.022	7.0	16.0	26.5	22.5	0.8	1360	29 223 K 3A 1 A
1250VDC	0.15	17.0	29.0	41.5	37.5	1.0	1580	29 154 K 3B 1 A
2000VDC	0.00082	6.0	12.0	18.0	15.0	0.8	3000 300	29 821 J 3D 1 Z
	0.00082	6.0	12.0	18.0	15.0	0.8	3000	29 821 J 3D 1 B
	0.00082	6.0	12.0	18.0	15.0	0.8	3000	29 821 G 3D 1 Z
	0.0022	6.0	12.0	18.0	15.0	0.8	3000	29 222 J 3D 1 B
	0.0047	7.0	16.0	26.5	22.5	0.8	2250	29 472 K 3D 1 A
	0.0047	7.0	16.0	26.5	22.5	0.8	2250	29 472 K 3D 1 Z
	0.01	7.0	16.0	26.5	22.5	0.8	2250	29 103 K 3D 1 Z
0.01	7.0	16.0	26.5	22.5	0.8	2250	29 103 K 3D 1 A	

Specific Data

Description	Value			
	Frequency	$C_R \leq 0.1 \mu\text{F}$	$0.1 \mu\text{F} < C_R \leq 1 \mu\text{F}$	$C_R > 1 \mu\text{F}$
Maximum tangent of loss angle (Tan δ)	1 kHz	0.0008	0.0008	0.001
	10 kHz	0.0015	0.0025	-
	100 kHz	0.0050	-	-
Voltage proof test between leads	1.6 times of the rated DC voltage for 2 second			
Insulation Resistance (R_{IS}) (or) time constant $T = C_R \times R_{IS}$ at 25° C, relative humidity $\leq 70\%$	$C_R \leq 0.33 \mu\text{F}$ $\geq 100000 \text{M}\Omega$		$C_R > 0.33 \mu\text{F}$ $\geq 30000 \text{ s}$	

Endurance Test

Loaded at 1.25 times of rated voltage at 85°C for 1000 hours.

After The Test

$\Delta C/C$: $\leq 10\%$ of initial value.

Increase of Tan δ : ≤ 0.005 at 1 kHz


Insulation Resistance: $\geq 50\%$ of the value mentioned in specific data.

only better


29 AC & Pulse Metallized Polypropylene Film Capacitor (PP/MMPP Series)

Irms Vs Frequency Graph


1000 VDC

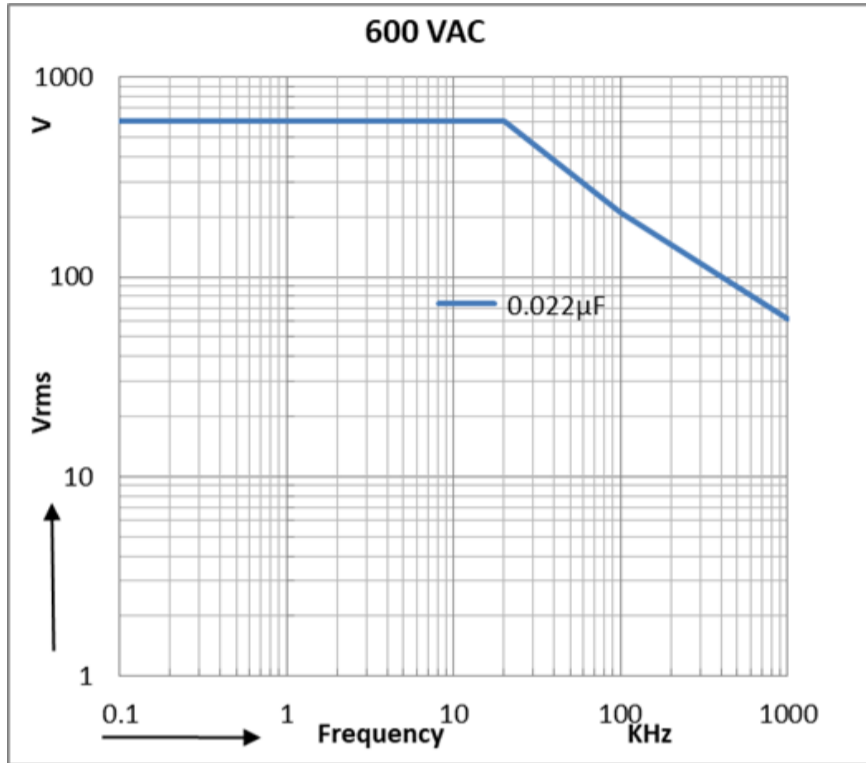


1250 VDC

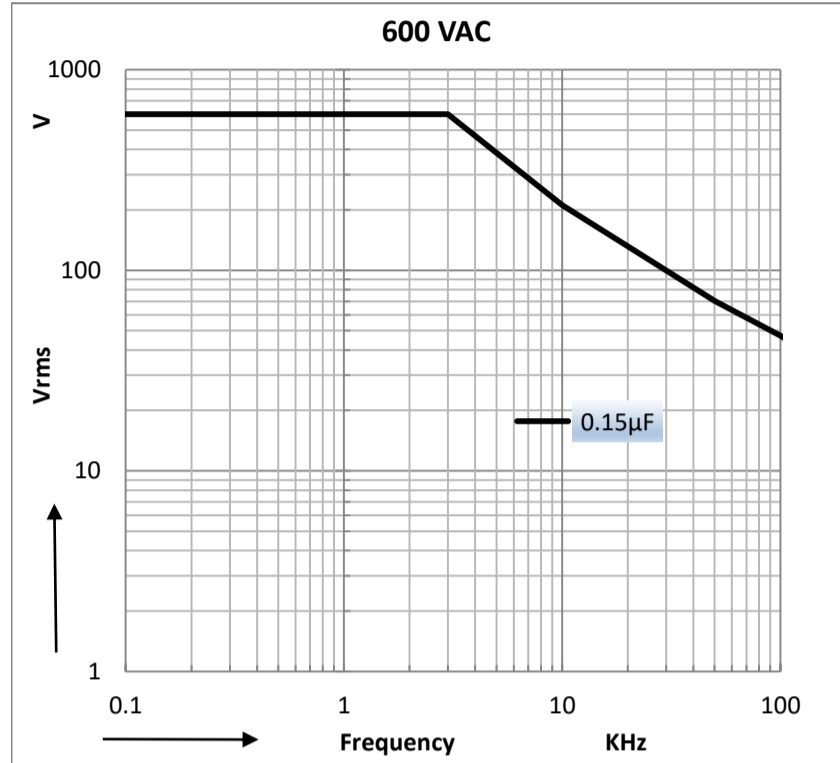


2000 VDC

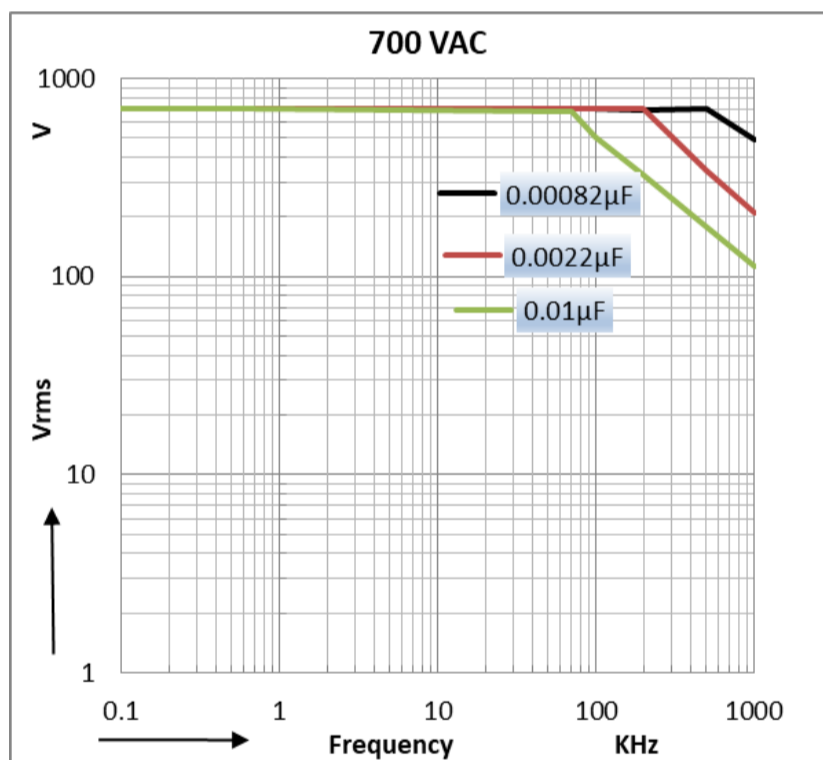

1000 VDC

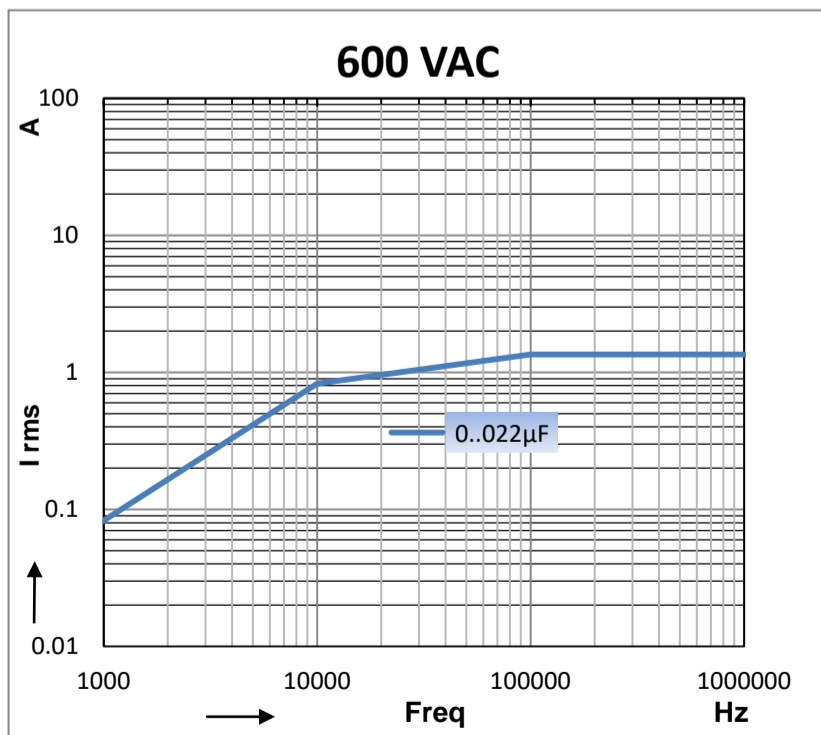



1250 VDC

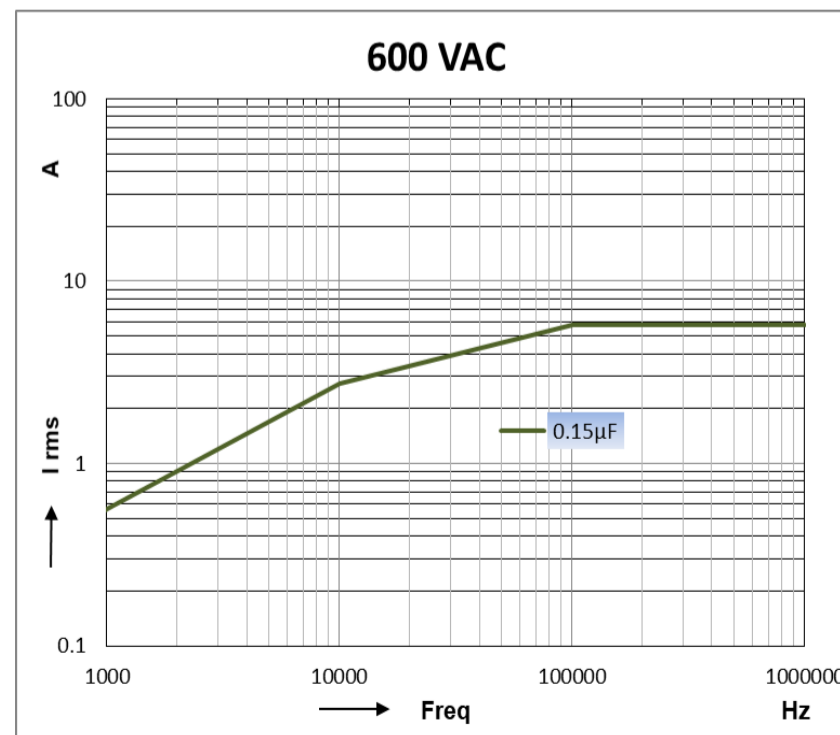

only better


29 AC & Pulse Metallized Polypropylene Film Capacitor (PP/MMPP Series)

2000 VDC

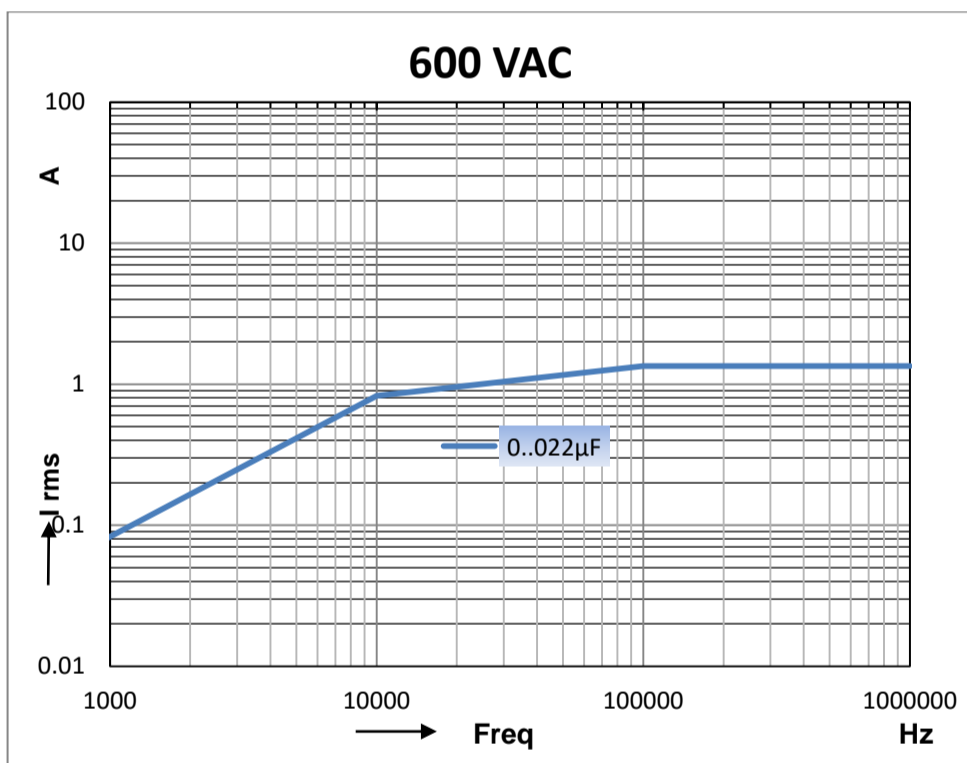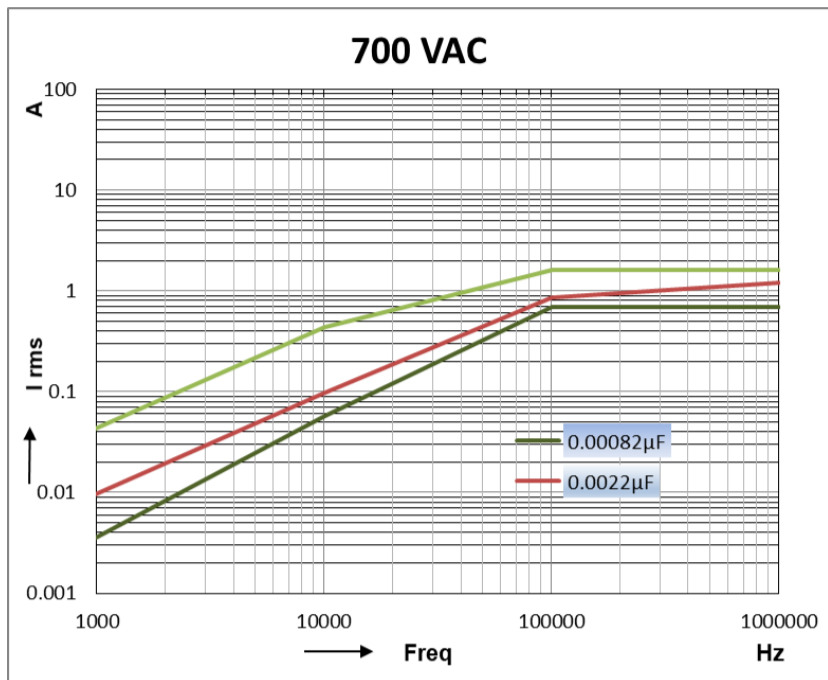

Temperature De-rating Graph

For temperature between 85°C and 100°C a derating factor of 1.25% per °C on the rated voltage V_R has to be applied.

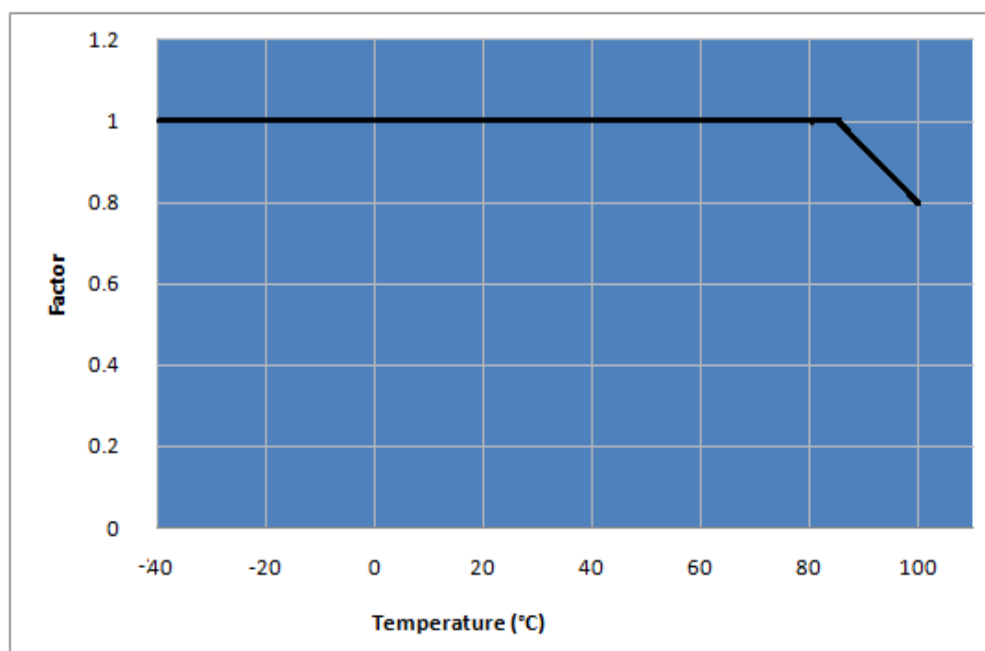


only better

Power Dissipation and Maximum Component Temperature Rise

After applying the A.C voltage to the capacitor with certain frequency, we can measure the hot Spot temperature of the capacitor. From that we can calculate ΔT .

ΔT = hot spot temperature – ambient temperature

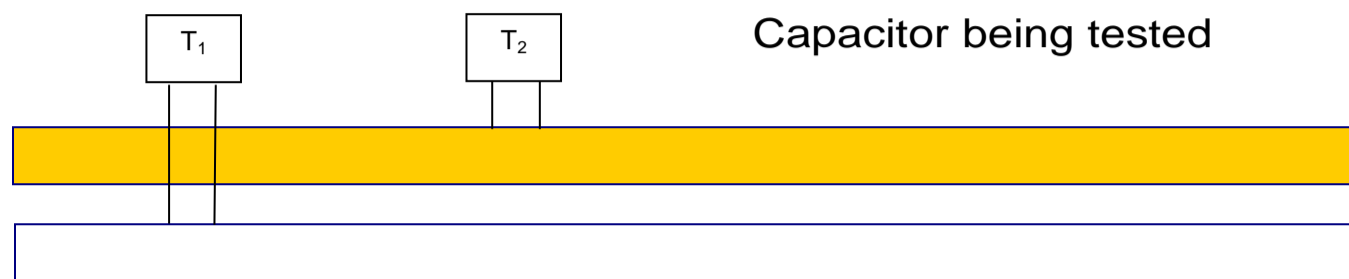

T1 is the capacitor under test (Connected in the circuit)

T2 is capacitor which has no connection

Distance between T1 and T2 should be about 50mm and 100mm from other components. To avoid radiation or convection, the capacitor should be tested in a wind-free box. The capacitor under test is separated by polystyrene.

$$\Delta T_{\max} = T1 - T2$$

At one frequency level the ΔT_{\max} reach 10°C. That is the frequency which we have to start frequency derating.

Storage Conditions

Avoid storing the capacitors in places where the environmental conditions differ from the following:

Storage time: ≤ 24 months from the date marked on the label glued to the package.

- Temperature: -40 to 80°C
- Humidity:

- Average per year: $\leq 70\%$
- For 30 full days randomly distributed throughout the year: $\leq 85\%$
- Dew: absent

After a longer period of storage or use, the tolerance can increase; but, according to standard specification, it may never exceed twice the value measured at the time of delivery.

Disclaimer

All our capacitors are designed, manufactured and tested to specifications. We strictly adhere to standards in procurement of materials, in the laid down manufacturing processes and consistently apply stringent process controls and testing parameters. This ensures that our capacitors always perform to the offered specifications.

Appropriateness of use in a specific circuit and fitness to a particular application however needs to be verified and its reliability through expected lifetime is required to be validated by the customer. Deki's responsibility is limited to ensuring that the capacitor performs as claimed in the specification/ data sheets provided by Deki. Deki specifically disclaims any implied warranties of fitness for any particular purpose. Liability, in any case is limited to the price paid for the capacitors.